


Absorbers

ARPYPU-MMW

Foam Pyramidal Poluyrathane Absorber for MMWave

Applications:

- RCS Testing for Automotive Radars
- Anechoic Chambers/Boxes for MMWave Testing
- Absorbing Collars (Shrouds) around the edges of MMW Testing
- Carbon and Retardant Chemicals loaded
- Lightweight, Flexible, RoHS and REACH compliant

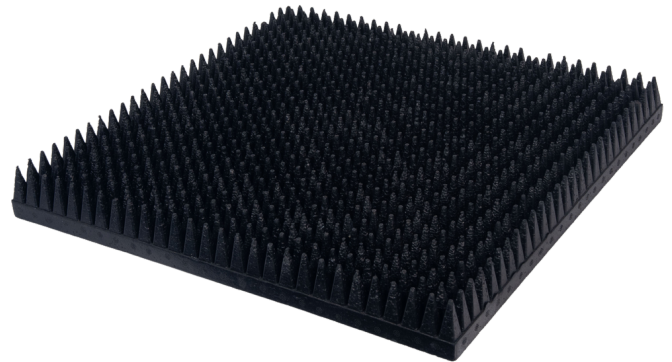

Characteristics

Operating Temperature (long-running)	-50°C-+70°C
Power Handling	800w/m ²
Fire Retardance	NRL8093
Standard Size	500*500*70mm(H)
Frequency Range	30 MHz-110 GHz
Reflectivity	-50dB@18~50GHz, -45dB@50~110GHz (will be 5 to 10dB better than normal type)